



# Mobi

## MICROPLATE SPECTROPHOTOMETER

[www.md-best.com](http://www.md-best.com)

 **MicroDigital Co., Ltd.**

  
**LC-Instru**

Mobi

Microplate Spectrophotometer

## Product Introduction

- Mobi features monochromator-based measurement optics to offer a wide range of wavelengths from UV to the visible spectrum.
- The cutting-edge technologies and system structure in Mobi allow precise movement and detection.
- The system supports measurements on 6 to 384 well microplate.



# Mobi MICROPLATE SPECTROPHOTOMETER



Mobi

Microplate Spectrophotometer

## Product Design


- The system offers various measurement modes: End-point, Spectral and Area Scanning, Kinetic, etc.
- In addition to the measurement, the system can carry out various supportive functions: shaking, incubation, measurement monitoring, delay, etc.
- Lightweight, compact size and distinctive shape make the device easy to transport and relocate.

Mobi

Microplate Spectrophotometer

## Software

- Separated sequence protocols, layouts allow the user interface to achieve great flexibility and simplicity in setting, editing, and executing the measurements.
- Graphical presentation of data allows users to analyze the results with convenience and efficiency.
- The measurement data can be exported as simple charts or full report in Excel sheets, PDFs, or other formats.

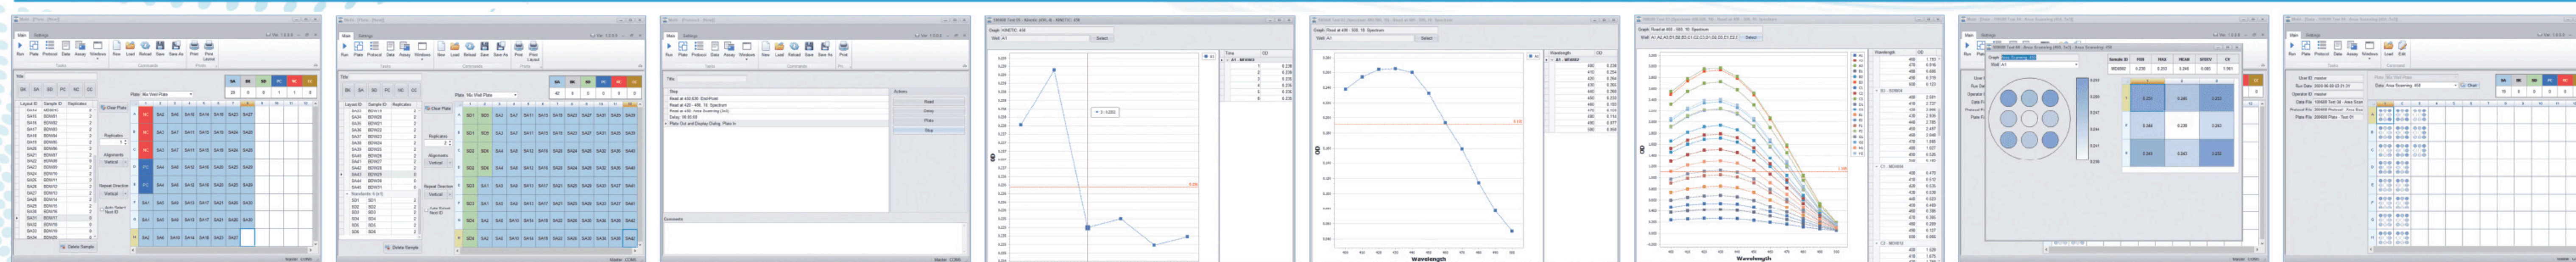

# TECHNICAL SPECIFICATION

## General Specification

Detection Modes	Absorbance
Reading Methods	End-point, Kinetic, Spectral Scanning, Well-Area Scanning
Microplate types	6 to 384 Well Microplate
Power	100 – 240 V AC, 50/60 Hz
Dimensions	396 x 364 x 207 mm
Weight	9.0 kg

## Reader Specification

Light Source	Xenon Flash Lamp
Detector	Photodiode
Wavelength Selection	Monochromator
Wavelength Range	200 – 999 nm (1 nm increments)
Monochromator Bandwidth	5 nm
Dynamic Range	0 – 4.0 OD
Resolution	0.0001 OD
Wavelength Accuracy	± 1.0 nm
Wavelength Repeatability	± 0.1 nm
OD Accuracy	± 1% at 2.0 OD, ± 3% at 2.5 OD
OD Repeatability	± 1% at 2.0 OD, ± 3% at 2.5 OD
OD Linearity	± 1% at 2.0 OD, ± 3% at 2.5 OD

## Shaking & Incubation Specification

Shaking	200 - 800 RPM
Temperature Range	RT - 40 °C



**MicroDigital Co., Ltd.**

WINS-7th floor, 15, Pangyo-ro 228beon-gil,  
Bundang-gu, Seongnam-si, Gyeonggi-do,  
13487, Rep. of KOREA  
TEL: +82-31-701-2225 FAX: +82-31-702-2225  
<http://www.md-best.com>

**LC-Instru**

Z.I. de l'Eglantier  
17 rue des Cerisiers  
91090 LISSES

Site web : [lc-instru.fr](http://lc-instru.fr)  
email : [info@lc-instru.fr](mailto:info@lc-instru.fr)  
Tél : 09.72.50.12.35  
Fax : 01.85.09.90.76